

Fire detection and evacuation solutions that save lives.

# LoopSense AS7240 Addressable Fire Alarm Control Panel

## Features

- 1 or 2 loop Fire Alarm Control Panel
- 500mA Loop Current
- 4 Programmable Inputs
- 4 Programmable Outputs
- 3 Programmable Relays
- 2 Programmable Open Collector Outputs
- Clear back lit 240 x 64 LCD
- Supports a range of panel Add-Ons
- Programmable via Front Panel
- Comprehensive loop monitoring and diagnostic support
- 3 Amp and 6 Amp Power Supply Available
- AS7240-2&4 and AS4428-3:2010 compliant



Figure 1: LoopSense SP1X

## Description

**LoopSense** is an Intelligent Analogue Addressable Fire Alarm Control Panel that is available in 1 or 2 loop options. The LoopSense comes packed with features designed to make it versatile, easy to install, easy to operate and easy to commission.

The **LoopSense** is suitable for small to medium sized fire detection systems and is compatible with Apollo XP95, Discovery, Xplorer and Series 90 detectors.

Programming the **LoopSense** is easily achieved via the front control panel or by using AMPAC's **LoopSense** configuration software **LoopMaster**.

**LoopMaster** is intuitive Windows based software that can be installed on laptops. The laptop is easily connected to the FACP via the USB or RS232 communication ports located on the panel's main termination board.

**LoopSense** supports a range of internal and external optional Panel Add-ons.

### Internal Panel Add-ons:

- 8 Zone Conventional Board
- 32 Zone Alarm Mimic Card
- 16 Way Input Board
- 8 Way Relay Board
- 8 Way Sounder Board
- Fire Fan Control and Termination Board
- Brigade Board
- Agent Release and Termination Board
- Front panel mounted printer

### External Panel Add-ons:

- *SmartTerminal*
- 8 Way Relay board
- Agent local Control Station

### Occupant Warning Systems

A range of Occupant Warning Systems (OWS) are available for use with the **LoopSense** FACP.

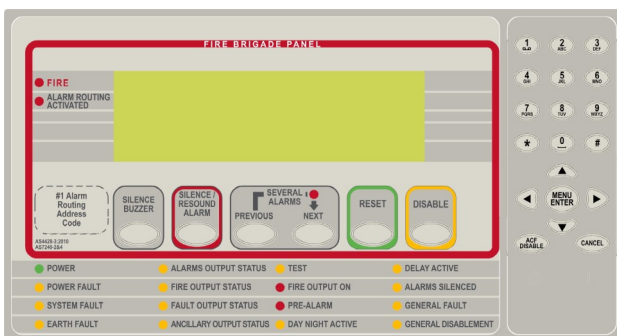


Figure 2: LoopSense Front Controls

Fire detection and evacuation solutions that save lives.

# LoopSense AS7240 Addressable Fire Alarm Control Panel

## Features

- Comprehensive Auto learn function
- Plug in key for 2nd loop enabling
- Supports up to thirty SmartTerminal's.
- Advanced balanced loop receive circuitry for highly effective common mode noise rejection
- Single-Ended and Redundant loop configuration capabilities
- Loop Statistics tool support for loop poll monitoring and loop noise level
- Sounder synchronisation across loops
- Walk test and silent walk test modes for zones
- Device locator LED test
- Dirty devices tool support for displaying and scrolling through dirty devices.
- Events upload via PC configuration tool. Exportable to html and can be imported into Excel spreadsheet
- Segmented log events storing a total of 1000 events in 8 separate event segments for fire, fault, pre-alarm, emergency, security, user, system, and disable events
- Day/night modes incorporating Normal, Investigation, Dependencies A, B and C and delays to outputs
- LoopMaster for downloading and uploading Boot, Application and configuration files
- Support for up to 999 programmable zones
- Cause & Effect programming
- Intuitive resolve configuration wizards for extra, mismatched and missing devices

## Item Numbers

8251-0110 LoopSense 1 Loop 3A SP1X

8251-0210 LoopSense 2 Loop 3A SP1X

8210-0001 Loop Activation Key

### Accessories

4210-0042 Flush Mount Surround for SP1X

8210-0001 2nd Loop Activation Key

## Specifications

Power Supply	
Power Supply	SP1X
<b>Power Supply</b>	3A
Input Voltage	204 – 264Vac
Protection	2A M205
Output Current	3A
Charger Current	600mA
Charger Output Voltage	27.5 VDC
Battery Size (Max)	2 x 26Ah
Battery Discharge Cut-off :	21Vdc
<b>Quiescent Current</b>	
1 Loop panel	115mA
2 Loop panel	135mA
Operating Temperature	0°C to + 40°C
Humidity	0% to 95% (non-condensing)
<b>Loops</b>	
Loop current	500mA maximum
Max Devices per Loop	126
Cabling Requirements	2 core 1.5 to 2.5mm <sup>2</sup>
Fault supervision	O/C, S/C, Over current
<b>Outputs</b>	
Alarm Sounder Outputs (Supervised)	4 x 24VDC @ 500mA Max 10K EOL
Relay outputs	3 x Voltage Free 24VDC @ 1A
Open Collector	2 x 30mA
Auxiliary VDC	2 x 24VDC @ 500mA
<b>Inputs</b>	
Supervised	4 x O/C, S/C, 10K EOL
<b>Communications Port</b>	
Internal to FACP	RS485
External to FACP	RS485
Printer port	RS232 or Parallel
PC Interfacing	RS232 or USB 2.0
<b>Mechanical</b>	
Material	1.2mm Steel
Colour/Finish	Surf Mist Ripple
Dimensions (mm)	500H x 405W x 150D