



# Combustible Gases Detector-Transmitter E2608-LEL




## Features

- Wall-mount or duct-mount version
- Industrial IP65 housing
- Two analog outputs settable to 4-20 mA or 0-10 V
- RS485 Modbus RTU digital interface
- Two relays for alarm / ventilation control
- Attached or remote sensor


## Specifications

Detected gases	Hydrogen, methane, acetylene, propane, butane, hexane, octane	
Default calibration	Methane CH <sub>4</sub>	
Sensor type	Metal-oxide semiconductor Pellistor (catalytic bead) on demand	
Sampling method	Diffusion	
Sensor	MOS	Pellistor
Typical detection range	0...100% LEL	0...100% LEL
Resolution	0.1% LEL	1% LEL
Response time T90	ca. 60 s	≤10 s
Sensor lifetime	> 5 years	> 3 years
Calibration interval	12 months	6 months
Operating temperature	-40...+70 °C	-10...+50°C
Signal update	Every 1 second	
Self-diagnostics	Full functionality check at start-up	
Warm-up time	≤ 1 min	
Power supply	12...36 VDC (default), 24 VAC or 230 VAC as options	
Power consumption	< 2 VA	
Digital interface	RS485, Modbus RTU protocol	
Analog outputs	2 × 4-20 mA / 0-10 V, user settable	
Output scale width	Recommended: 20-100% of the range; > 10 × resolution in any case	
Output relays	2 × SPST relays (closing contact), 250 VAC / 30 VDC, 5 A max	
Default alarm setpoints	LOW: set 20 %LEL, release 16% LEL; HIGH: set 50%LEL, release 40% LEL	
Enclosure	Grey ABS plastic, wall mount, protection class IP65	
Dimensions	H87 × W82 × D55 mm	
Remote sensor probe	Protection IP65, shielded cable default cable length 3.0 m	
Operating environment	Industrial indoor and outdoor locations	
Operating conditions	(operating temperature is mentioned above) 95% RH non-condensing; 0.9...1,1 atm Explosion-safe areas Normal ambient oxygen level No strong mechanical shock, vibrations or EMI; Avoid exposure to corrosive gases or silicone containing products.	

### Wall mount version

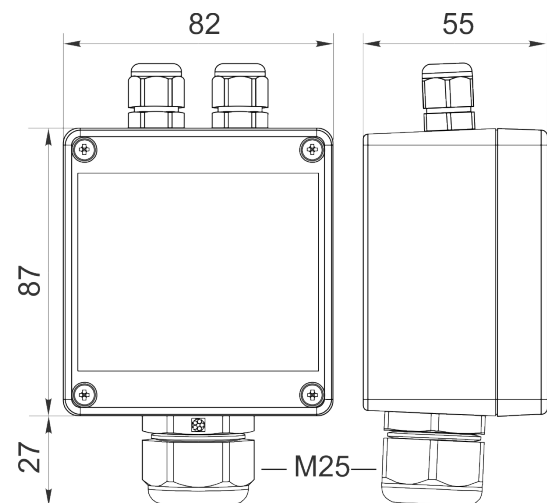


### Duct mount version

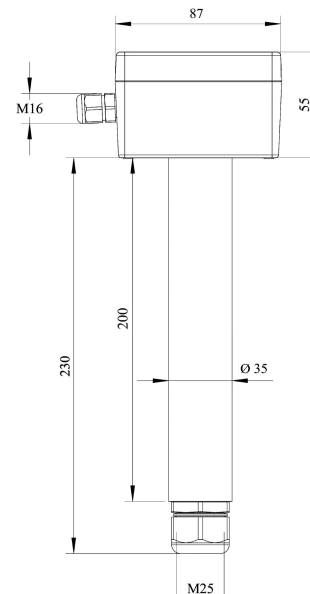


Ask for other versions or custom designed products

## Connection diagrams

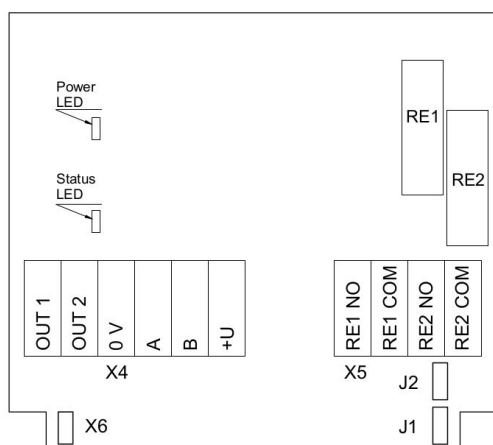

Version without PSU

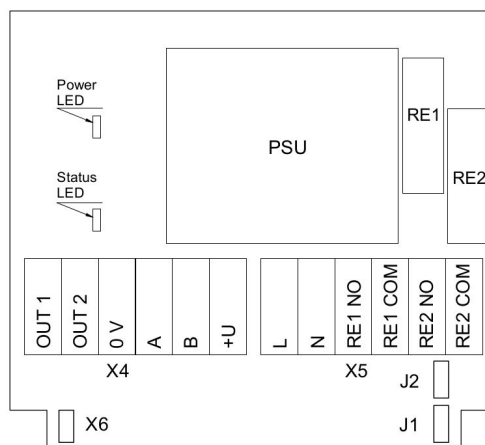

Version with PSU

### Jumpers

**J1** OUT1 type (open: 4-20 mA; closed 0-10 V)  
**J2** OUT2 type (open: 4-20 mA; closed 0-10 V)  
**X6** Reset Modbus network parameters to default


### X4 terminals

**OUT1** 4-20 mA / 0-10 V output  
**OUT2** 4-20 mA / 0-10 V output  
**0V** 0 V / 24 VAC Neutral (optional)  
**A** RS485 A / Data +  
**B** RS485 B / Data -  
**+U** +24 VDC / 24 VAC Phase (optional)


### X5 terminals (optional)

**L** 90...265 VAC Phase  
**N** 90...265 VAC Neutral  
**RE1 NO** Relay 1, normally open terminal  
**RE1 COM** Relay 1, common terminal  
**RE2 NO** Relay 2, normally open terminal  
**RE2 COM** Relay 2, common terminal

## Remote probe

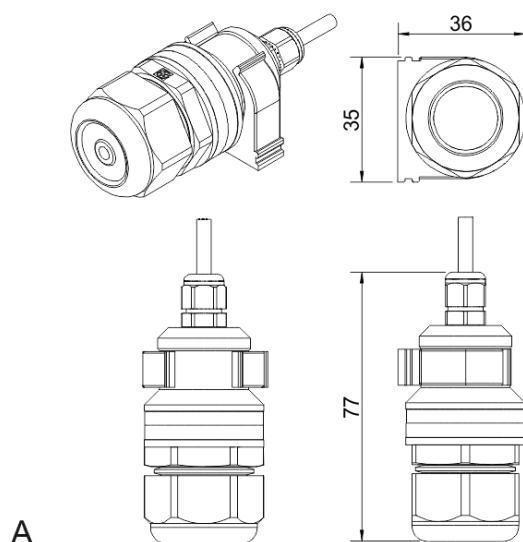

A

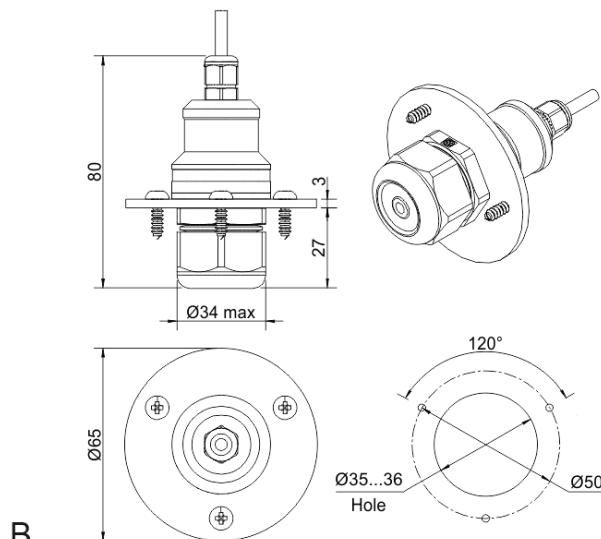

B

Wall mount remote probe with fixing clamp (default version)

Remote probe with rubber flange and three self-tapping screws (on request)