



Manufactured by Vimpex in the UK, the ClamBell® EN54-3 approved fire bell incorporates traditional and innovative design.

The hinged design of ClamBell® means installers benefit from reduced installation time. Once fitted to the wall and wired to the circuit, ClamBell® clicks shut.

Low power consumption and good sonorous tone result from use of an aluminium gong which also significantly reduces weight.

Three mounting versions are available - shallow base, deep base and purpose designed weatherproof option.



Specification

Rated Voltage (dc)

24 V	20.4 - 27.6
12 V	9.6 - 13.2

Nominal Current (mA)

24 V	12
12 V	12

Sound Output dB(A) @1 m (max)

96

Temperature Range (C°)

Shallow Base	-10 to +50
Deep Base	-25 to +70
Weatherproof Base	-25 to +70

Humidity Range (%)

<96%

Weight (g)

24 V & 12 V

Shallow Base	378 g
Deep Base	497 g
Weatherproof Base	522 g

Gong Colour

Red/White/Grey

Gong Construction

Aluminium

IP Rating

Shallow Base	IP21C
Deep Base	IP33C
Weatherproof Base	IP56 CAT 2**

*Available on request

**Weatherproofing not approved by LPCB, tested and approved by Intertek

CLAMBELL®

Features

- / Permanently fitted gong
- / Specifically designed weatherproof back box
- / Mounting options for European, Asian and US style installations
- / Slick and modern looking
- / Fully customised pad printed branding*
- / Strobello option which integrates ClamBell® and bright VID for unique combined unit available

Approvals



Part Numbers

ClamBell® 24 V	CBE6-XS-024-EN	ClamBell® 24 V 6" Fire Alarm Bell - Shallow Base
	CBE6-XA-024-EN	ClamBell® 24 V 6" Fire Alarm Bell - Shallow Base/US Install Plate
	CBE6-XD-024-EN	ClamBell® 24 V 6" Fire Alarm Bell - Deep Base
	CBE6-XW-024-EN	ClamBell® 24 V 6" Fire Alarm Bell - Weatherproof
ClamBell® 12 V	CBE6-XS-012-EN	ClamBell® 12 V 6" Fire Alarm Bell - Shallow Base
	CBE6-XA-012-EN	ClamBell® 12 V 6" Fire Alarm Bell - Shallow Base/US Install Plate
	CBE6-XD-012-EN	ClamBell® 12 V 6" Fire Alarm Bell - Deep Base
	CBE6-XW-012-EN	ClamBell® 12 V 6" Fire Alarm Bell - Weatherproof


Other gong colours available subject to minimum order quantity. Please contact VimpeX for full list of colours. Customers must specify R=Red, W=White or G=Grey when placing an order.

Part Numbers - Accessories

CBE6-230MP*** ClamBell® 230Vac Mains Pack

***Must be purchased with Deep/Weatherproof variants.

Dimensions

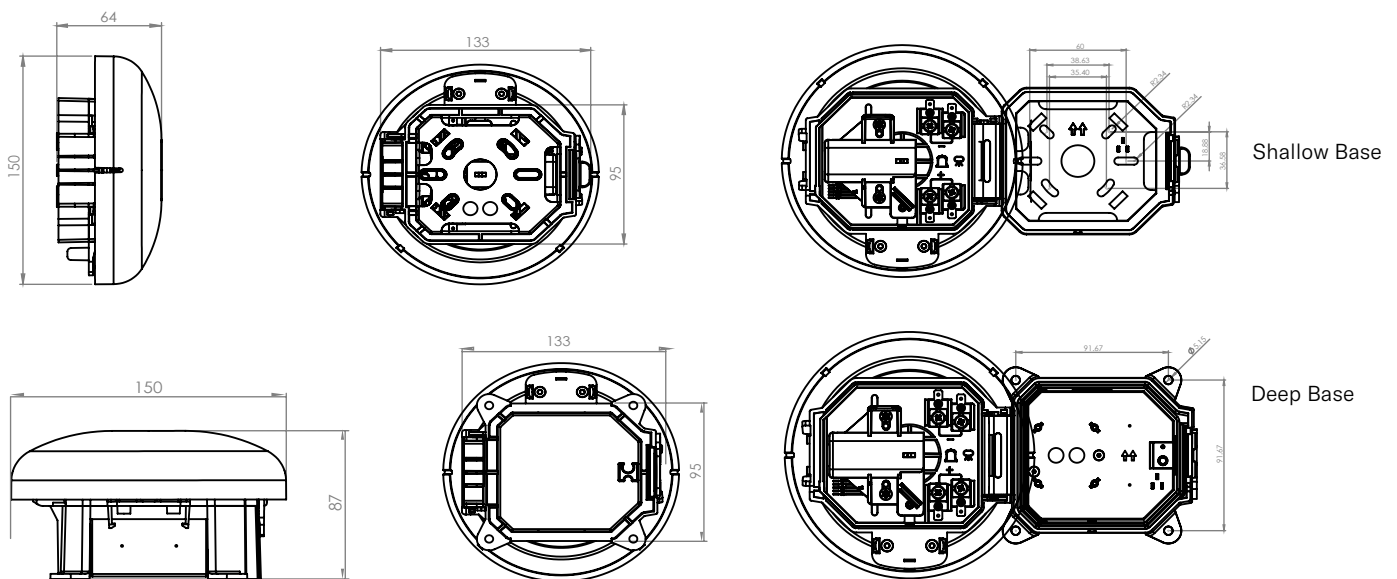

FIREFLY TECHNOLOGY (HONG KONG) CO., LTD

Address: Room 2914C, 29th Floor, Ho King Commercial Centre, 2-16 Fa Yuen Street, Mong Kok, Kowloon, Hong Kong
Tel: 00852 4613 9499 Email: Firefly@fire-fly.hk Website: <http://www.fire-fly.hk>